


## Under-Deck Panel

## Product Data



**Soffit Profile**  
(Flat Pan Standard)

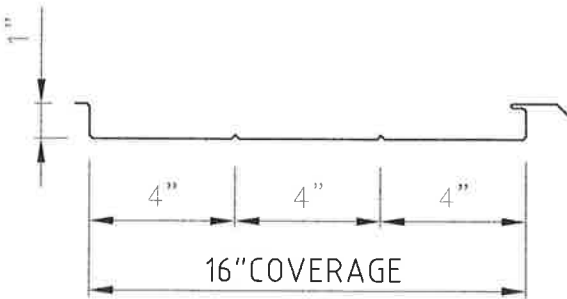

**Soffit Profile**  
(Double Pencil Rib Optional)

Applications

Concealed fastener soffit panel. Standard panel lengths up to 40'.

Substrates

Plywood, Purlins, Hat Section or Mac-Girts.

Material

Standard - 26 GA. ASTM A792 (50 ksi steel) AZ55 - Bare  
AZ50 - Painted  
Optional - 24 GA. ASTM A792 (50 ksi steel) AZ55 - Bare  
AZ50 - Painted

0.032 Aluminum  
16 Ounce Copper

Manufacturing

Roll formed in factory.

Finishes

Acrylic Coated Galvalume®  
Fluoropolymer (Kynar 500® PVDF resin-based)  
Cold Roll  
Copper



Pan Conditions

Non-Vented: Flat Pan (Standard), Double Pencil Rib (Optional)


Oil canning is inherent in all metal panels and is not cause for panel rejection. A signed oil canning acknowledgement will be required for all orders prior to production.

NOTE:

All data represented on this sheet may not be applicable to all widths and gauges.

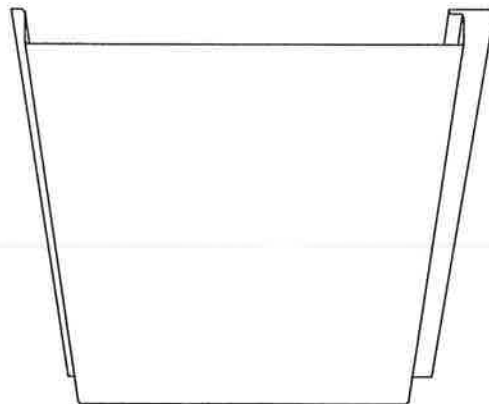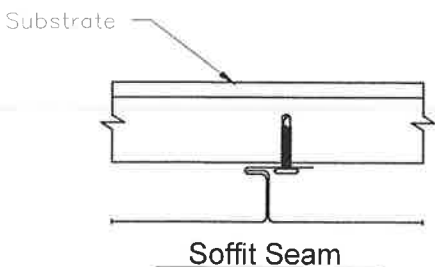

**FLAT PAN STANDARD PANEL**

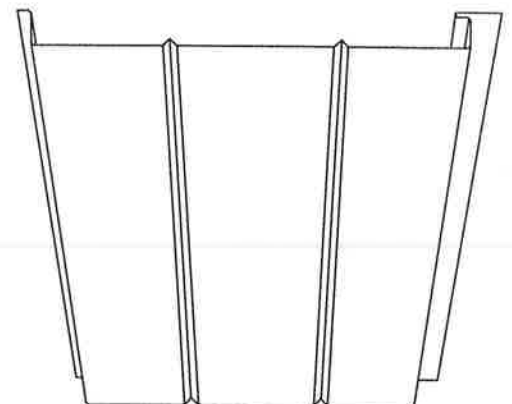

**DOUBLE PENCIL RIB PANEL**  
(OPTIONAL)