

Metal buildings, siding and roofing panels for pre-engineered, agri-buildings, gutters, down spouts and metal building components.

With more than 25 years of market experience, the 10S silicone polyester system by Valspar is a proven performer.

It is an excellent exterior finish for:

- Pre-Engineered Buildings • Agri-Buildings • Component Parts

Its exterior durability includes resistance to extreme weather flux such as freeze and/or thaw cycles, sun and rain. It also resists general air pollution. Coil Clad 10S offers superior transit abrasion resistance to endure the physical abuses caused by transportation, construction, and daily wear and tear.

Valspar's Coil Clad 10S is available in a wide range of standard and custom colors, as well as USDA approved white for use in food processing applications.

The 10S system can be applied at maximum line speeds. Warranties are available upon request.

SUBSTRATE*

PRIMER

HDG Steel G60 or G90, Gallan®, Aluminum: (PTY0012) Galvalume® or Zincolume® Steel:

Epoxy Primer (543L007)/Ultraflex II Primer Epoxy G Primer (560Y004)

FIELD PERFORMANCE

Table with 3 columns: Property, Vertical (90° Angle), Non-Vertical (Angle > 15° from Vertical). Rows include Film Integrity, Chalk Resistance, and Color Change.

* All Substrates Must be Properly Pre-Treated


This information is based on test reports considered reliable but is presented without guarantee or responsibility as to the applicability correctness of this information or the suitability of our products whether used singly or in combination with other products.

CL513


RECOMMENDED FASTENER POSITION FOR ROOFING



RECOMMENDED SCHEDULE FOR NAIL FASTENING OF 5V CRIMP

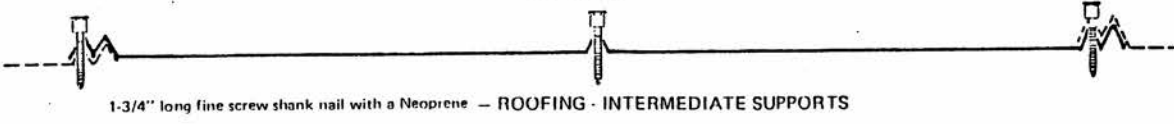

1-3/4" long fine screw shank nail with a Neoprene - ROOFING - INTERMEDIATE SUPPORTS

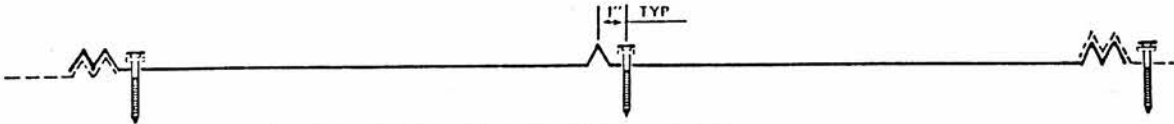

1-1/4" long fine screw shank nail with a Neoprene - SIDING

RECOMMENDED SCHEDULE FOR SCREW FASTENING OF 1-1/4" x 1/4" CORRUGATED




RECOMMENDED SCHEDULE FOR NAIL FASTENING OF 2-1/2" x 1/2" CORRUGATED



RECOMMENDED SCHEDULE FOR NAIL FASTENING




2" long fine screw shank nail with a Neoprene - ROOFING

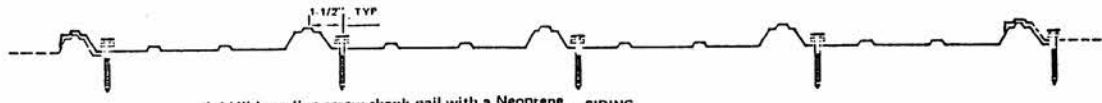

1-1/4" long fine screw shank nail with a Neoprene - SIDING

RECOMMENDED SCHEDULE FOR SCREW FASTENING



1" long Self-Drilling Wood Screw with a combination metal and Neoprene Washer.