


5V-Crimp Panel

Product Data



5V-CRIMP PANEL PROFILE

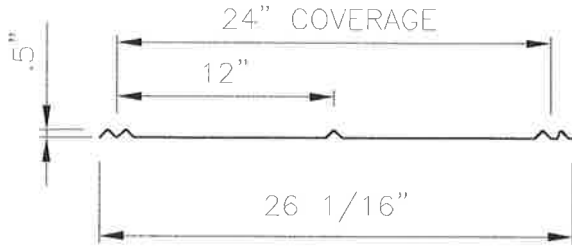

5V-CRIMP PANEL SEAM



**FASTENER PATTERN
(@ Eaves, Ridges & Endlaps)**



**FASTENER PATTERN
(@ Intermediate Spacings)**



FOAM INSIDE CLOSURE



FOAM OUTSIDE CLOSURE

Applications

Exposed fastener roof panel used on slopes down to 3:12. Standard panel lengths up to 40'. Please inquire for longer lengths.

Substrates

Plywood

Material

- Standard - 26 GA. Steel ASTM A792 (50 ksi steel) AZ55 - Bare
AZ50 - Painted
- Standard - 29 GA. Steel ASTM A792 (50 ksi steel) AZ55 - Bare
G90 - Bare
- Standard - 26 GA. Steel Cold Roll

Manufacturing

Roll formed in factory.

Finishes

- Acrylic Coated Galvalume®
- Acrylic Coated Galvanized G90
- Cold Roll
- Siliconized Polyester
- Fluoropolymer (Kynar 500® PVDF resin-based)

Pan Conditions

Oil canning is inherent in all metal panels and is not cause for panel rejection.

NOTE:

All data represented on this sheet may not be applicable to all widths and gauges.