


1 1/4" Corrugated Panel

Product Data

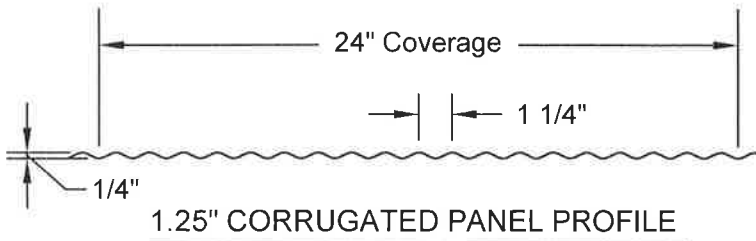

Applications

Exposed fastener roof panel used on slopes down to 3:12. Standard panel lengths up to 40'. Please inquire for longer lengths.

Substrates

Plywood

Material

Standard - 29 GA. Steel ASTM A792 (50 ksi steel) AZ55 - Bare
G90 - Bare

Optional - 26 GA. Steel ASTM A792 (50 ksi steel) AZ55 - Bare
AZ50 - Painted


Optional - 26 GA. Steel Cold Roll

Manufacturing

Roll formed in factory.

Finishes

Acrylic Coated Galvalume®
Acrylic Coated Galvanized G90
Cold Roll
Siliconized Polyester

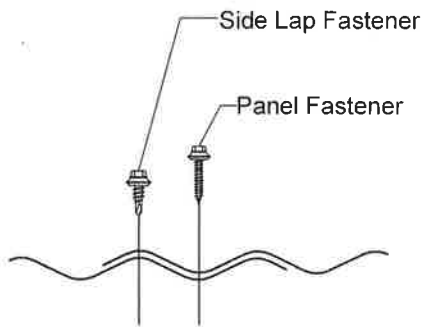


1.25" CORRUGATED PANEL SEAM

Pan Conditions

Oil canning is inherent in all metal panels and is not cause for panel rejection.

NOTE:

All data represented on this sheet may not be applicable to all widths and gauges.

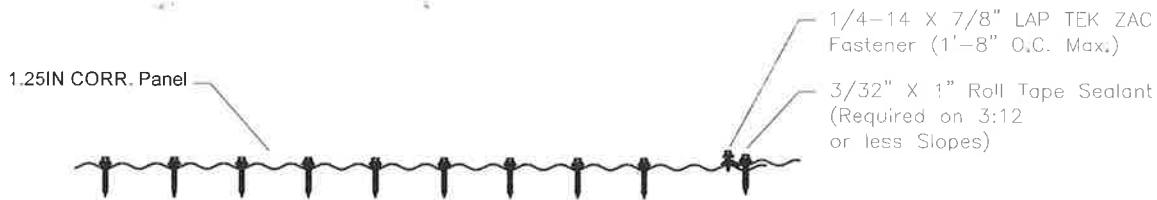

FASTENER PATTERN
(@ Eaves, Ridges & Endlaps)



FASTENER PATTERN
(@ Intermediate Purlins)

