


## 2 1/2" Corrugated Panel

## Product Data

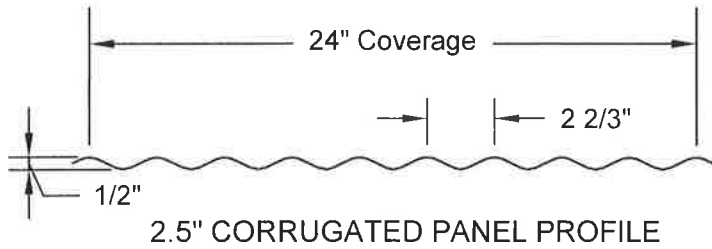

**2.5" CORRUGATED PANEL SEAM**

Applications

Exposed fastener roof panel used on slopes down to 3:12. Standard panel lengths up to 40'. Please inquire for longer lengths.

Substrates

Plywood

Material

- Standard - 29 GA. Steel ASTM A792 (50 ksi steel) AZ55 - Bare  
G90 - Bare
- Optional - 26 GA. Steel ASTM A792 (50 ksi steel) AZ55 - Bare  
AZ50 - Painted
- Optional - 26 GA. Steel Cold Roll

Manufacturing

Roll formed in factory.

Finishes

- Acrylic Coated Galvalume®
- Acrylic Coated Galvanized G90
- Cold Roll
- Siliconized Polyester

Panel Conditions

Oil canning is inherent in all metal panels and is not cause for panel rejection.

**NOTE:**

All data represented on this sheet may not be applicable to all widths and gauges.

