
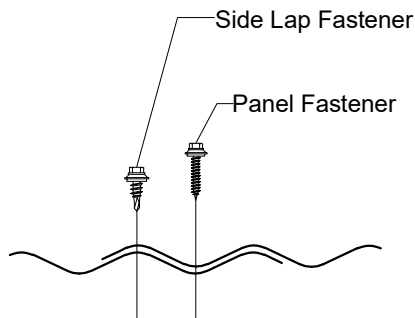


## 1 1/4" Corrugated Panel

## Product Data

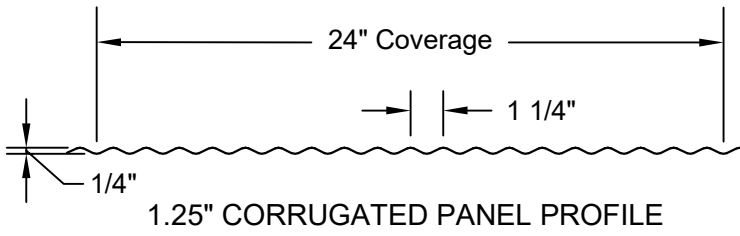

### Applications

Exposed fastener roof panel used on slopes down to 3:12. Standard panel lengths up to 40'. Please inquire for longer lengths.

### Substrates

Plywood

### Material

Standard - 29 GA. Steel ASTM A792 (50 ksi steel) AZ55 - Bare  
G90 - Bare

Optional - 26 GA. Steel ASTM A792 (50 ksi steel) AZ55 - Bare  
AZ50 - Painted

Optional - 26 GA. Steel Cold Roll

### Manufacturing

Roll formed in factory.

### Finishes

Acrylic Coated Galvalume®  
Acrylic Coated Galvanized G90  
Cold Roll  
Siliconized Polyester

### Panel Conditions

Oil canning is inherent in all metal panels and is not cause for panel rejection.

### NOTE:

All data represented on this sheet may not be applicable to all widths and gauges.

