
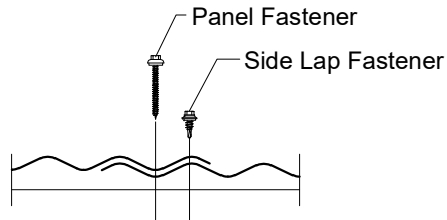


2 1/2" Corrugated Panel

Product Data

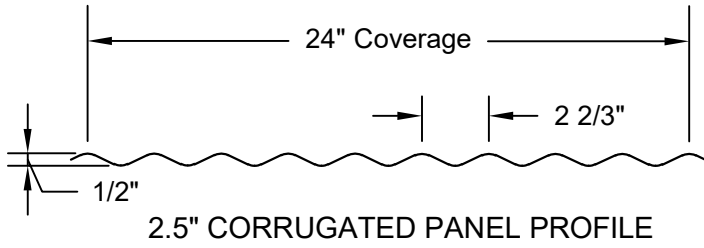

Applications

Exposed fastener roof panel used on slopes down to 3:12. Standard panel lengths up to 40'. Please inquire for longer lengths.

Substrates

Plywood

Material

Standard - 29 GA. Steel ASTM A792 (50 ksi steel) AZ55 - Bare
 G90 - Bare
 Optional - 26 GA. Steel ASTM A792 (50 ksi steel) AZ55 - Bare
 AZ50 - Painted
 Optional - 26 GA. Steel Cold Roll

Manufacturing

Roll formed in factory.

Finishes

Acrylic Coated Galvalume®
 Acrylic Coated Galvanized G90
 Cold Roll
 Siliconized Polyester

Panel Conditions

Oil canning is inherent in all metal panels and is not cause for panel rejection.

NOTE:

All data represented on this sheet may not be applicable to all widths and gauges.

