


## 5V-Crimp Panel


## Product Data




5V-CRIMP PANEL PROFILE

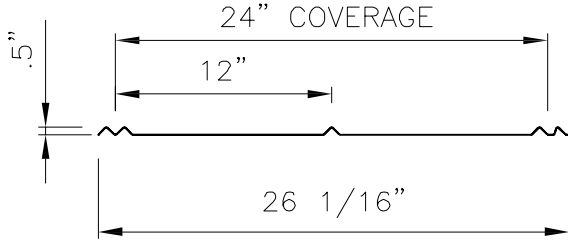

5V-CRIMP PANEL SEAM

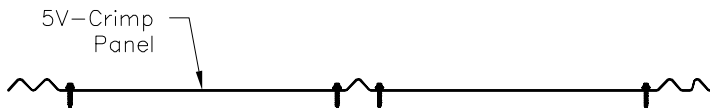

FASTENER PATTERN  
(@ Eaves, Ridges & Endlaps)

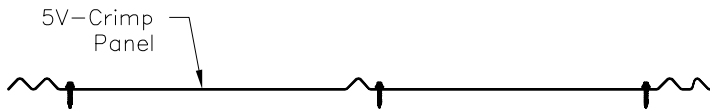

FASTENER PATTERN  
(@ Intermediate Spacings)

Applications

Exposed fastener roof panel used on slopes down to 3:12. Standard panel lengths up to 40'. Please inquire for longer lengths.

Substrates

Plywood

Material

Standard - 26 GA. Steel ASTM A792 (50 ksi steel) AZ55 - Bare  
AZ50 - Painted  
Standard - 29 GA. Steel ASTM A792 (50 ksi steel) AZ55 - Bare  
G90 - Bare  
Standard - 26 GA. Steel Cold Roll

Manufacturing

Roll formed in factory.

Finishes

Acrylic Coated Galvalume®  
Acrylic Coated Galvanized G90  
Cold Roll  
Siliconized Polyester  
Fluoropolymer (Kynar 500® PVDF resin-based)

Panel Conditions


Oil canning is inherent in all metal panels and is not cause for panel rejection.

NOTE:

All data represented on this sheet may not be applicable to all widths and gauges.



FOAM INSIDE CLOSURE



FOAM OUTSIDE CLOSURE