


Soffit Panel

Product Data



Soffit Profile
(Flat Pan Standard)

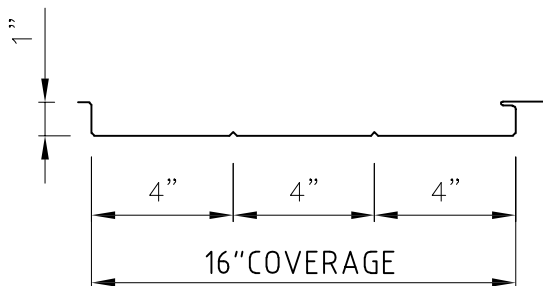

Soffit Profile
(Double Pencil Rib Optional)

Applications

Concealed fastener soffit panel. Standard panel lengths up to 40'.

Substrates

Plywood, Purlins, Hat Section or Mac-Girts.

Material

Standard - 26 GA. ASTM A792 (50 ksi steel) AZ55 - Bare
AZ50 - Painted
Optional - 24 GA. ASTM A792 (50 ksi steel) AZ55 - Bare
AZ50 - Painted

0.032 Aluminum
16 Ounce Copper

Manufacturing

Roll formed in factory.

Finishes

Acrylic Coated Galvalume®
Fluoropolymer (Kynar 500® PVDF resin-based)
Cold Roll
Copper

Pan Conditions

Non-Vented: Flat Pan (Standard), Double Pencil Rib (Optional)



Vented: Flat Pan (Standard) or Single Pencil Rib (Optional)

Ventilation = 2% Net Free Air


Oil canning is inherent in all metal panels and is not cause for panel rejection. A signed oil canning acknowledgement will be required for all orders prior to production.

NOTE:

All data represented on this sheet may not be applicable to all widths and gauges.

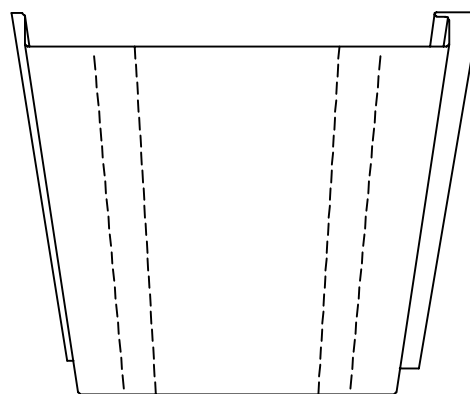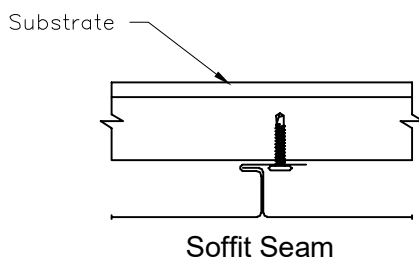

VENTED PANEL

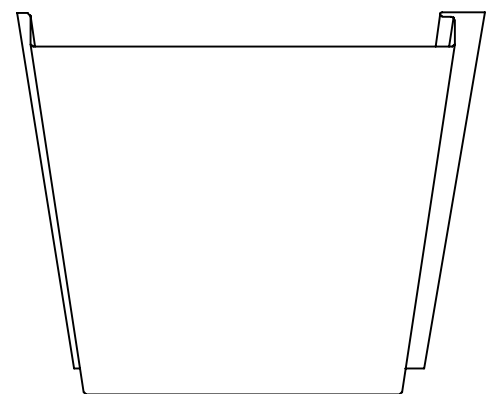

NON-VENTED PANEL