


## 1" Form Decking

## Product Data

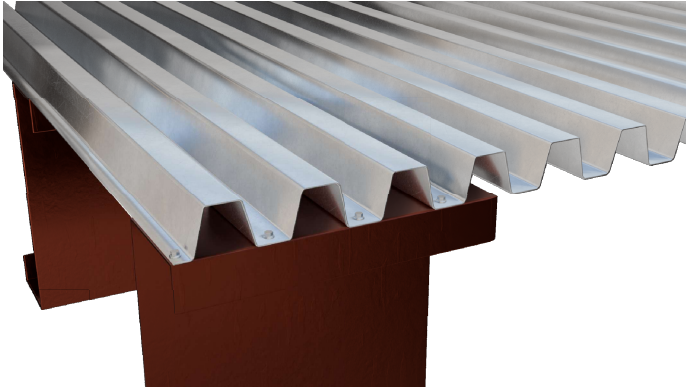

### Applications

Used primarily as a structural base for floors (composite with concrete) and roofs (supporting insulation/roofing) in commercial buildings, mezzanines, and multi-story structures.

### Substrates

Open framing, supporting steel joists

### Material

Standard - 24 GA. (50 to 55 ksi steel)

Optional - 18 GA., 20 GA., 22 GA., & 26 GA. (50 to 55 ksi steel)

### Manufacturing

Roll formed in factory.


### Finishes

Standard: Galvanized

Optional: Painted

### NOTE:

All data represented on this sheet may not be applicable to all widths and gauges.

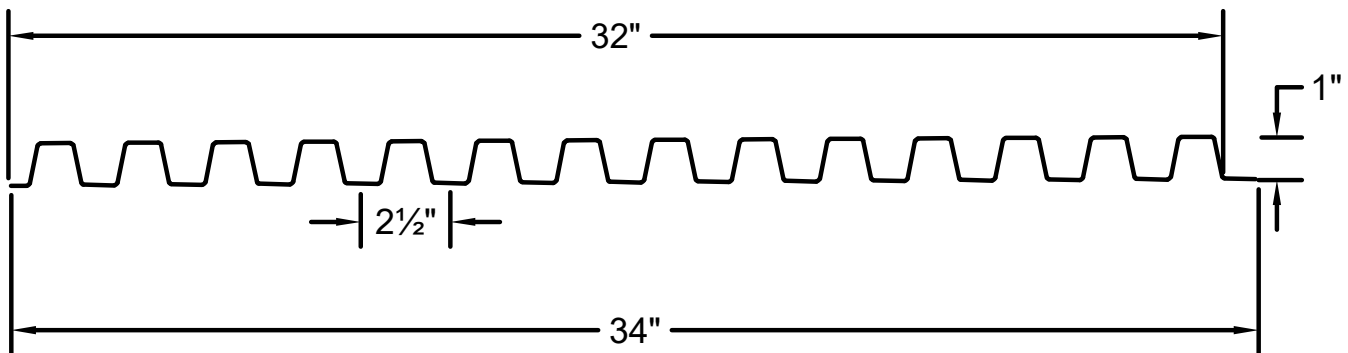

### Section Properties:

Gauge	Design Thickness	Weight (psf)	Fy (ksi)	Se+ (in <sup>2</sup> /ft)	Se- (in <sup>2</sup> /ft)	Id+ (in <sup>4</sup> /ft)	Id- (in <sup>4</sup> /ft)
26	0.0179	1.1000	60	0.0610	0.0650	0.0360	0.0350
24	0.0239	1.4600	60	0.0900	0.0960	0.0490	0.0490
22	0.0295	1.7800	60	0.1200	0.1250	0.0640	0.0620
20	0.0358	2.1400	60	0.1540	0.1530	0.0800	0.0780