


2 1/2" Corrugated Load Table

Product Data

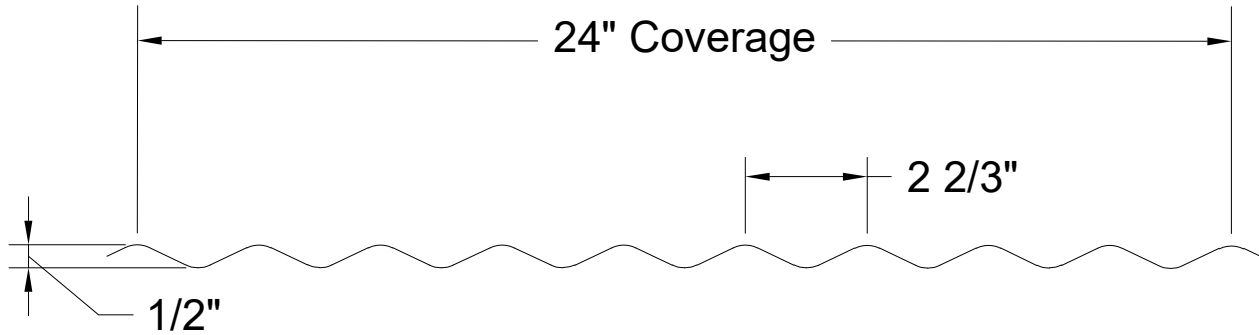

Section Properties

Ga	Width (in)	Yeild (ksi)	Weight (psf)	Top in Compression		Bottom in Compression	
				Ixx (in ⁴ /ft)	Sxx (in ³ /ft)	Ixx (in ⁴ /ft)	Sxx (in ³ /ft)
29	21.33	80	0.7	0.0056	0.0215	0.0056	0.0208
26	21.33	50	0.9	0.0073	0.0275	0.0073	0.0274

Allowable Uniform Loads, psf. For various fastener spacing

Ga	Inward Load						Outward Load					
	2'-0"	2'-6"	3'-0"	3'-6"	4'-0"	4'-6"	2'-0"	2'-6"	3'-0"	3'-6"	4'-0"	4'-6"
29	118	60	35	22	15	10	118	60	35	22	15	10
26	153	78	45	29	19	13	153	78	45	29	19	13