


Reverse R-Panel and Reverse R-Panel PBR

Product Data

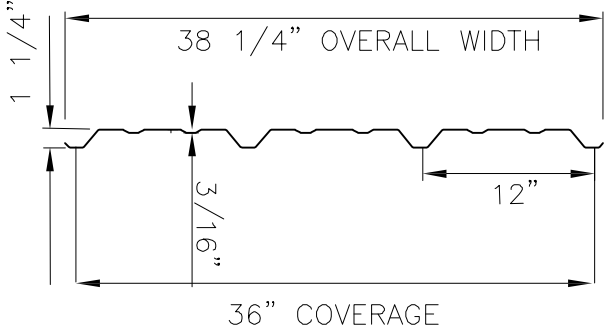

R-PANEL PROFILE - WALLS
(Non-Purlin Bearing Leg)

Applications

Exposed fastener wall, ceiling, or underdeck panel. Standard panel lengths up to 50'. Please inquire for longer lengths.

Substrates

Plywood or Purlins.

Material

Standard - 26 GA. ASTM A792 (50 or 80 ksi steel)
AZ55 - Bare, AZ50 - Painted
Optional - 22 GA. & 24 GA. ASTM A792 (50 ksi steel)
AZ55 - Bare, AZ50 - Painted

Manufacturing

Roll formed in factory.

Finishes


Acrylic Coated Galvalume®
Fluoropolymer (Kynar 500® PVDF resin-based)
Siliconized Polyester
Cold Roll

Pan Conditions


Oil canning is inherent in all metal panels and is not cause for panel rejection.

NOTE:


All data represented on this sheet may not be applicable to all widths and gauges.

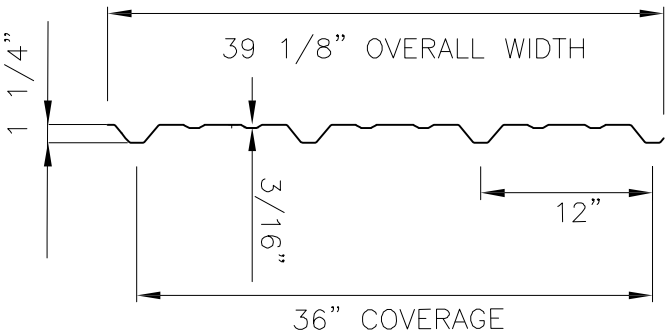

R-PANEL PROFILE
(Purlin Bearing Leg)




FOAM INSIDE CLOSURE



FOAM OUTSIDE CLOSURE

Reverse R-Panel



FASTENER PATTERN
(@ Intermediate Purlins)