

2" Hat Channel

Product Data



Applications

Versatile framing components used in construction for furring walls/ceilings to create level surfaces, ceiling framing, exterior cladding or roofing system support.

Substrates

Plywood, Purlins, Metal Tubing, Wood Framing, etc.

Material

Standard - 24 GA. (50 to 55 ksi steel)

Optional - 16 GA., 18 GA., 20 GA., & 22 GA. (50 to 55 ksi steel)

Manufacturing

Roll formed in factory.

Finishes


Galvanized

Features

A great option when a taller profile hat channel is needed.

NOTE:

All data represented on this sheet may not be applicable to all widths and gauges.

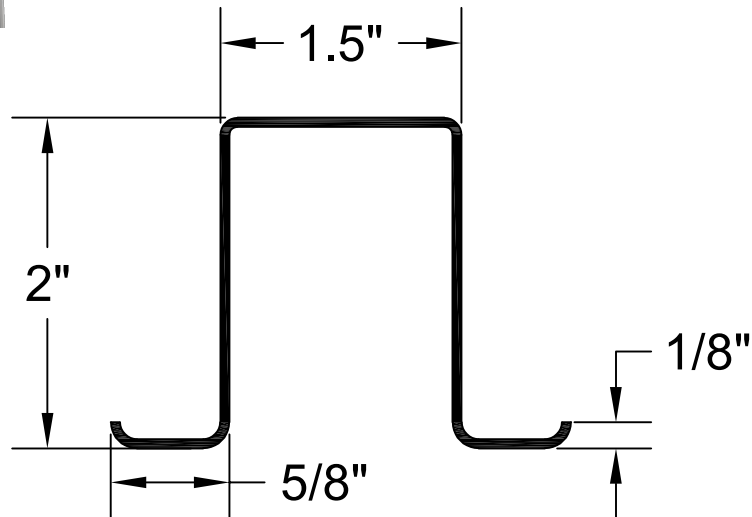

Gross Selection Properties

	Design Thickness (in)	Yield Strength FY (ksi)	Area (in ²)	Weight (lb/ft)	I _x (in ⁴)	R _x (in)	I _y (in ⁴)	R _y (in)
150F200-43	0.048	50	0.328	1.116	0.5227	1.2621	0.1232	0.6127
150F200-54	0.057	50	0.408	1.388	0.651	1.264	0.1535	0.6127
150F200-68	0.072	50	0.5178	1.762	0.8279	1.2655	0.1949	0.6139